


# Agilent 8590 E-Series Portable Spectrum Analyzers

## Data Sheet

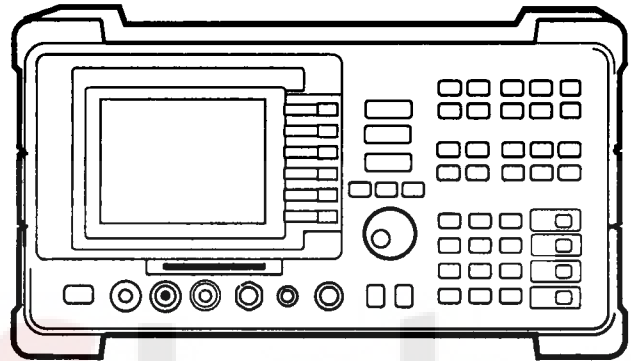

These specifications apply to the Agilent Technologies 8591E, 8593E, 8594E, 8595E, and 8596E spectrum analyzers.

### Specifications

All specifications apply over 0°C to +55°C. The analyzer will meet its specifications after 2 hours of storage at a constant temperature, within the operating temperature range, 30 minutes after the analyzer is tuned on, and after CAL FREQ and CAL AMPTD (and for the 8593E, 8595E, and 8596E CAL YTF) have been run.

#### 8594E

dc coupled 9 kHz to 2.9 GHz  
 ac coupled 100 kHz to 2.9 GHz

#### 8595E

dc coupled 9 kHz to 6.5 GHz  
 ac coupled 100 kHz to 6.5 GHz

#### 8596E

dc coupled 9 kHz to 12.8 GHz  
 ac coupled 100 kHz to 12.8 GHz

Band	LO harmonic = N	
0	1	9 kHz to 2.9 GHz (dc coupled)
0	1	100 kHz to 2.9 GHz (ac coupled)
1	1	2.75 GHz to 6.5 GHz
2	2	6.0 GHz to 12.8 GHz

### Frequency Specifications

#### Frequency Range

##### 8591E

50 Ω 9 kHz to 1.8 GHz  
 75 Ω 1 MHz to 1.8 GHz

##### 8593E

9 kHz to 22 GHz

Option 026/027 9 kHz to 26.5 GHz

Band	LO harmonic = N	
0	1	9 kHz to 2.9 GHz
1	1	2.75 GHz to 6.5 GHz
2	2	6.0 GHz to 12.8 GHz
3	3	12.4 GHz to 19.4 GHz
4	4	19.1 GHz to 22.0 GHz
4	4 (Opt. 026/027)	19.1 GHz to 26.5 GHz

### Frequency Reference

		(Opt. 004)
Aging	$\pm 2 \times 10^{-6}/\text{year}$	$\pm 1 \times 10^{-7}/\text{year}$
Temperature Stability	$\pm 5 \times 10^{-6}$	$\pm 1 \times 10^{-8}$
Initial Achievable Accuracy	$\pm 0.5 \times 10^{-6}$	$\pm 2.2 \times 10^{-8}$



**Agilent Technologies**

Innovating the HP Way

### Frequency Readout

#### Accuracy

(Start, Stop, Center, Marker)  $\pm(\text{frequency readout} \times \text{frequency reference error}^1 + \text{span accuracy} + 1\% \text{ of span} + 20\% \text{ of RBW} + 100 \text{ Hz} \times N^*)$

### Marker Count Accuracy

Frequency Span  $\leq 10 \text{ MHz} \times N^*$   $\pm(\text{marker frequency} \times \text{frequency reference error}^1 + \text{counter resolution} + 100 \text{ Hz} \times N^*)$

Frequency Span  $> 10 \text{ MHz} \times N^*$   $\pm(\text{marker frequency} \times \text{frequency reference error}^1 + \text{counter resolution} + 1 \text{ kHz} \times N^*)$

Counter Resolution  
 Frequency Span  $\leq 10 \text{ MHz} \times N^*$  Selectable from 10 Hz to 100 kHz

Frequency Span  $> 10 \text{ MHz} \times N^*$  Selectable from 100 Hz to 100 kHz

### Frequency Span

Range 0 Hz (zero span), and

	Opt. 130	Std.	Max (GHz)
	Min. (KHz)	Min. (KHz)	
8591E	1	10	1.8
8593E	1 x N*	10 x N*	19.25
8594E	1	10	2.9
8595E	1	10	6.5
8596E	1 x N*	10 x N*	12.8

Resolution Four digits or 20 Hz x N\* whichever is greater

Accuracy  
 Span  $\leq 10 \text{ MHz} \times N^*$   $\pm 2\%$  of span  
 Span  $> 10 \text{ MHz} \times N^*$   $\pm 3\%$  of span

### Frequency Sweep Time

Range  
 Span = 0 Hz,  $> 1 \text{ kHz}$  20 ms to 100 s  
 Span = 0 Hz (Opt. 101) 20  $\mu\text{s}$  to 100 s

Accuracy  
 20 ms to 100 s  $\pm 3\%$   
 20  $\mu\text{s}$  to  $< 20 \text{ ms}$  (Opt. 101)  $\pm 2\%$

Sweep Trigger Free run, single, line, video, external

Resolution Bandwidth 1 kHz to 3 MHz (3 dB) in 1-3-10 sequence.  
 9 kHz and 120 kHz (6 dB) EMI bandwidths.  
 Option 130 Adds 30, 100, and 300 Hz (3 dB) bandwidths and 200 Hz (6 dB) EMI bandwidth.


Accuracy  $\pm 20\%$

Selectivity (Characteristic)  
 -60 dB/-3 dB  
 3 kHz to 10 kHz 15:1  
 100 kHz to 3 MHz 15:1  
 1 kHz, 30 kHz 16:1  
 -40 dB/-3 dB  
 30 Hz to 300 Hz 10:1

Video Bandwidth Range 30 Hz to 1 MHz in 1,3 sequence  
 1 Hz to 1 MHz (Opt 130)

### Stability

Noise Sidebands (1 kHz RBW, 30 Hz VBW and sample detector)  
 $> 10 \text{ kHz}$  offset from CW signal  $\leq -90 \text{ dBc/Hz} + 20 \text{ Log } N^*$   
 $> 20 \text{ kHz}$  offset from CW signal  $\leq -100 \text{ dBc/Hz} + 20 \text{ Log } N^*$   
 $> 30 \text{ kHz}$  offset from CW signal  $< -105 \text{ dBc/Hz} + 20 \text{ Log } N^*$

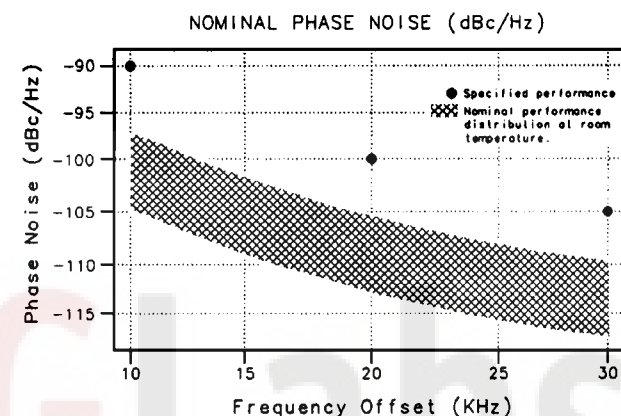

### Residual FM

#### 8591E

1 kHz RBW, 1 kHz VBW  $\leq 250 \text{ Hz}$  pk-pk in 100 ms  
 30 Hz RBW, 30 Hz VBW  $\leq 30 \text{ Hz}$  pk-pk in 300 ms

#### 8593E, 94E, 95E, 96E

1 kHz RBW, 1 kHz VBW  $\leq (250 \times N^*) \text{ Hz}$  pk-pk in 100 ms  
 30 Hz RBW, 30 Hz VBW  $\leq (30 \times N^*) \text{ Hz}$  pk-pk in 300 ms

### System-Related Sidebands

$> 30 \text{ kHz}$  offset from CW signal  $\leq -65 \text{ dBc} + 20 \text{ Log } N^*$

### Comb Generator Frequency

#### 8593E, 96E

100 MHz fundamental frequency

### Accuracy

$\pm 0.007\%$

\* N = LO harmonic. N = 1 for 91E, 94E, 95E

1. Frequency reference error = (aging rate x period of time since adjustment + initial achievable accuracy + temperature stability).

### Amplitude Specifications

Amplitude specifications do not apply for Analog+ mode and negative peak detector mode except as noted in "Amplitude Characteristics."

#### Amplitude Range

8591E (Opt. 001)      Displayed average noise level to +30 dBm  
 Displayed average noise level to +72 dBmV

#### Maximum Safe Input Level (input attenuator ≥10 dB)

Average Continuous Power      +30 dBm (1 W)  
 8591E (Opt. 001)      +72 dBmV (0.2 W)  
 Peak Pulse Power  
 8591E      +30 dBm (1 W)  
 8591E (Opt. 001)      +72 dBmV (0.2 W)  
 8593E, 94E, 95E, 96E      +50 dBm (100 W) for < 10 μs pulse width and <1 % duty cycle, input attenuation ≥30 dB.

#### dc

8591E      25 Vdc  
 8591E (Opt. 001)      100 Vdc  
 8593E      0 Vdc  
 8594E, 95E, 96E      0 V (dc coupled)  
                                  50 V (ac coupled)

#### Gain Compression

>10 MHz      ≤0.5 dB (total power at input mixer<sup>2</sup> = -10 dBm)


### Displayed Average Noise Level

(Input terminated, 0 dB attenuation, 1 Hz/30 Hz VBW, sample-detector)

	30 Hz RBW	1 kHz RBW
<b>8591E</b>		
400 kHz to 1 MHz	≤-130 dBm	≤-115 dBm
1 MHz to 1.5 GHz	≤-130 dBm	≤-115 dBm
1.5 GHz to 1.8 GHz	≤-128 dBm	≤-113 dBm
<b>8591E (Opt. 001)</b>		
1 MHz to 1.5 GHz	≤-78 dBmV	≤-63 dBmV
1.5 GHz to 1.8 GHz	≤-76 dBmV	≤-61 dBmV
<b>8593E</b>		
400 kHz to 2.9 GHz	≤-127 dBm	≤-112 dBm
2.75 GHz to 6.5 GHz	≤-129 dBm	≤-114 dBm
6.0 GHz to 12.8 GHz	≤-117 dBm	≤-102 dBm
12.4 GHz to 19.4 GHz	≤-113 dBm	≤-98 dBm
19.1 GHz to 22 GHz	≤-107 dBm	≤-92 dBm
<b>8593E (Opt. 026/027)</b>		
19.1 GHz to 26.5 GHz	≤-102 dBm	≤-87 dBm
<b>8594E</b>		
400 kHz to <5 MHz	≤-122 dBm	≤-107 dBm
5 MHz to 2.9 GHz	≤-127 dBm	≤-112 dBm
<b>8595E</b>		
400 kHz to 2.9 GHz	≤-125 dBm	≤-110 dBm
2.75 GHz to 6.5 GHz	≤-127 dBm	≤-112 dBm
<b>8596E</b>		
400 kHz to 2.9 GHz	≤-125 dBm	≤-110 dBm
2.75 GHz to 6.5 GHz	≤-127 dBm	≤-112 dBm
6.0 GHz to 12.8 GHz	≤-115 dBm	≤-100 dBm

### Nominal Dynamic Range

Agilent 8593E (Option 130)

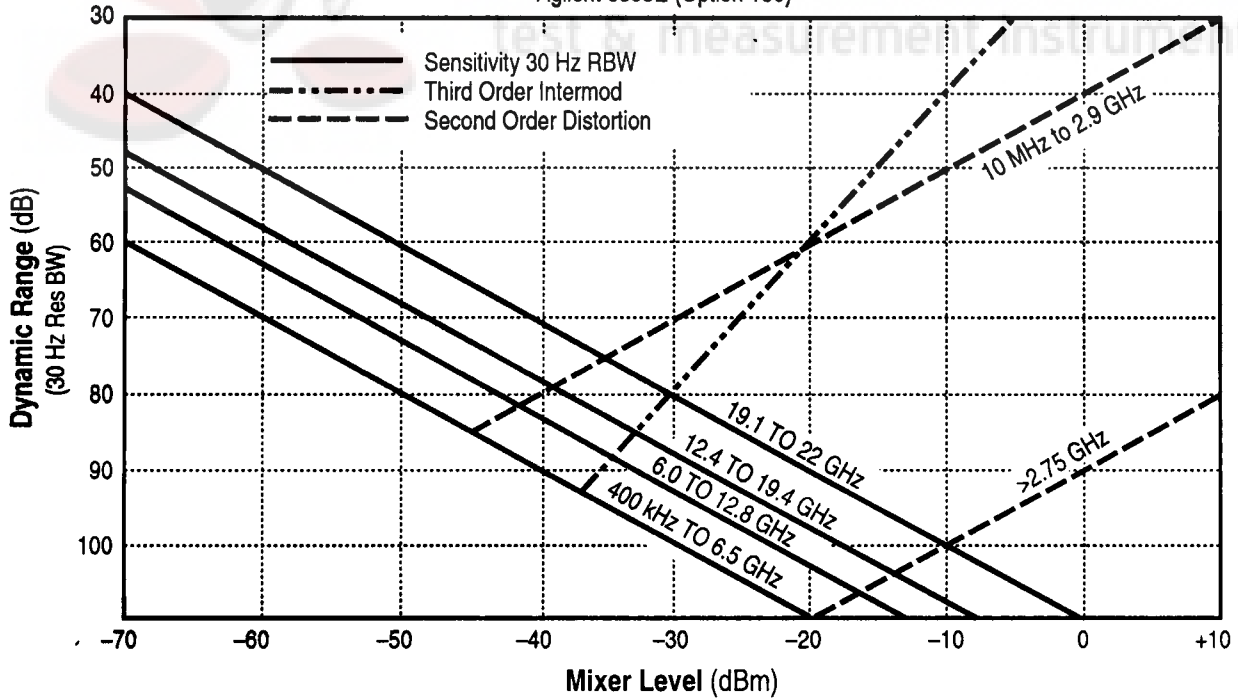

2. Mixer Power Level (dBm) = Input Power (dBm) Input Atten. (dB)

### Spurious Responses

#### Second Harmonic Distortion

5 MHz to 1.8 GHz (91E)	<-70 dBc for -45 dBm tone at input mixer. <sup>2</sup>
10 MHz to 2.9 GHz (93E)	<-70 dBc for -40 dBm tone at input mixer. <sup>2</sup>
>10 MHz (94E, 95E, 96E)	<-100 dBc for -10 dBm tone at input mixer <sup>2</sup> (or below displayed average noise level).
>2.75 GHz (93E, 95E,96E)	

#### Third Order Intermodulation Distortion

5 MHz to 1.8 GHz (91E)	<-70 dBc for two -30 dBm tones at input mixer <sup>2</sup> and >50 kHz separation.
>10 MHz (93E, 94E, 95E, 96E)	

#### Other Input Related Spurious

≤1.8 GHz (91E)	<-65 dBc at ≥30 kHz offset, for -20 dBm tone at input mixer <sup>2</sup>
≤2.9 GHz (94E)	
≤6.5 GHz (95E)	
≤12.8 GHz (96E)	
≤18 GHz (93E)	
≤22 GHz (93E)	<-60 dBc at ≥30 kHz offset, for -20 dBm tone at input mixer <sup>2</sup>

### Residual Responses (input terminated and 0 dB attenuation)

1 MHz to 1.8 GHz (91E Opt. 001)	<-38 dBmV
150 kHz to 1.8 GHz (91E)	<-90 dBm
150 kHz to 2.9 GHz (94E)	<-90 dBm
150 kHz to 6.5 GHz (93E, 95E, 96E)	<-90 dBm

### Display Range

Log Scale	0 to -70 dB from reference level is calibrated; 0.1, 0.2, 0.5 dB/division and 1 to 20 dB/division in 1 dB steps; eight divisions displayed.
Linear Scale	Eight divisions
Scale units	dBm, dBmV, dBuV, V, and W

<b>Marker Readout Resolution</b>	0.05 dB for log scale 0.05% of reference level for linear scale
----------------------------------	--

<b>Fast Sweep Times for Zero Span (Opt. 101 or 301)</b>	
20 μs to 20 ms	
≤1 GHz	0.7% of reference level for linear scale
>1 GHz	1.0% of reference level for linear scale

### Reference Level

Range	same as amplitude range
Resolution	0.1 dB for log scale, 0.12% of reference level for linear scale
Accuracy	±0.3 dB @ -20 dBm ±(0.3 dB +.01 x dB from -20 dBm)
	0 dBm to -59.9 dBm

### Frequency Response

<i>8591E</i>	(10 dB input attenuation)	
9 kHz to 1.8 GHz	Absolute <sup>3</sup>	Relative Flatness <sup>4</sup>
	±1.5 dB	±1.0 dB
<i>8593E</i>	Preselector peaked in band > 0	
	Absolute <sup>3</sup>	Relative Flatness <sup>4</sup>
9 kHz to 2.9 GHz	±1.5 dB	±1.0 dB
2.75 GHz to 6.5 GHz	±2.0 dB	±1.5 dB
6.0 GHz to 12.8 GHz	±2.5 dB	±2.0 dB
12.4 GHz to 19.4 GHz	±3.0 dB	±2.0 dB
19.1 GHz to 22 GHz	±3.0 dB	±2.0 dB
19.1 GHz to 26.5 GHz	±5.0 dB	±2.0 dB
<i>8594E, 95E, 96E</i>	(dc coupled preselector peaked)	
	Absolute <sup>3</sup>	Relative Flatness <sup>4</sup>
9 kHz to 2.9 GHz	±1.5 dB	±1.0 dB
2.75 GHz to 6.5 GHz	±2.0 dB	±1.5 dB
6.0 GHz to 12.8 GHz	±2.5 dB	±2.0 dB

### Calibrator Output

Amplitude	-20 dBm ±0.4 dB
<i>8591E Opt.001</i>	+28.75 dBmV ±0.4 dB

### Resolution Bandwidth

<b>Switching Uncertainty</b> (Referenced to 3 kHz RBW, at ref. level)	
3 kHz to 3 MHz RBW	±0.4 dB
1 kHz RBW	±0.5 dB
30 Hz to 300 Hz RBW	±0.6 dB

<b>Linear to Log Switching</b>	±0.25 dB at reference level
--------------------------------	-----------------------------

### Display Scale Fidelity

Log Maximum Cumulative	
0 to -70 dB from reference level	
3 kHz to 3 MHz RBW	± (0.3 + 0.01 x dB from reference level)
30 Hz to 1kHz RBW	± (0.4 + 0.01 x dB from reference level)
Log Incremental Accuracy	±0.4 dB/4 dB
0 to -60 dB from reference level	
Linear Accuracy	±3% of reference level

3. Referenced to 300 MHz CAL OUT.  
 4. Ref. to midpoint between highest and lowest freq. response deviations.

## Option Specifications

### Option 010 and 011 Tracking Generator

#### Frequency Range

8591E	100 kHz to 1.8 GHz
(Opt. 011, 75 Ω)	1 MHz to 1.8 GHz
8593E, 94E, 95E, 96E	9 kHz to 2.9 GHz

#### Output Level

##### Range

8591E	0 to -70 dBm
8591E (Opt. 011)	+42.8 to -27.2 dBmV
8593E, 94E, 95E, 96E	-1 to -66 dBm

##### Resolution

0.1 dB

##### Absolute Accuracy

(@ 300 MHz, -20 dBm, +28.8 dBmV)

8591E	±1.0 dB
8593E, 94E, 95E, 96E	±0.75 dB

### Vernier

##### Range

8591E	10 dB
8593E, 94E, 95E, 96E	9 dB

##### Accuracy

8591E	±0.75 dB
8593E, 94E, 95E, 96E	±0.5 dB

### Output Attenuator

##### Range

8591E	0 to 60 dB, 10 dB steps
8593E, 94E, 95E, 96E	0 to 56 dB, 8 dB steps

### Output Flatness

8591E	±1.75 dB
8593E, 94E, 95E, 96E (>10 MHz)	±2.0 dB

### Effective Source Match (Characteristic)

8591E	1.6:1 (10 dB attenuation)
8593E, 94E, 95E, 96E	1.5:1 (8 dB attenuation)

### Spurious Output

#### Harmonic Spurs

8591E (0 dBm, +42.8 dBmV output)	<-25 dBc
8593E, 94E, 95E, 96E (-1 dBm Output)	

#### Nonharmonic Spurs

8591E	<-30 dBc
8593E, 94E, 95E, 96E	
300 kHz to 2.0 GHz	≤-27 dBc
2.0 GHz to 2.9 GHz	≤-23 dBc

### Dynamic Range (Characteristic)

	Dynamic Range <sup>5</sup>	TG Feedthrough
8591E	106 dB	≤-106 dBm
8591E (Opt. 011)	100 dB	≤-57.24 dBmV
8593E (> 400 kHz)	111 dB	≤-112 dBm
8594E (> 400 kHz)	106 dB	≤-107 dBm
(> 5 MHz)	111 dB	≤-112 dBm
8595E (>400 kHz)	109 dB	≤-110 dBm
8596E (> 400 kHz)	109 dB	≤-110 dBm

### Power Sweep

#### Range

8591E (-15 dBm to 0 dBm) -(source attenuator setting)

8591E (Opt 011) (+27.8 to 42.8 dBmV)-(source attenuator setting)

8593E, 94E, 95E, 96E (-10 dBm to -1 dBm)-(source attenuator setting)

#### Resolution

0.1 dB

### Option 103 Quasi-Peak Detector

Amplitude response conforms with Publication 16 of Comité International Spécial des Perturbations Radioélectriques (CISPR) Section 1, Clause 2.

### Option 105 Time Gated Spectrum Analysis

#### Gate Delay

Range	1 μs to 65.535 ms
Resolution	1 μs
Accuracy	±(1 μs + 0.01% x Gate Delay Readout) <sup>6</sup>
(From Gate Trigger Input to positive edge of Gate Output)	

#### Gate Length

Range	1 μs to 65.535 ms
Resolution	1 μs
Accuracy	±(0.2 μs + (0.01% x Gate Length Readout))
(From positive edge to negative edge of Gate Output)	

### Additional Gate Amplitude Error<sup>7</sup>

Log Scale	<2 μs	±0.8 dB
	≥2 μs	±0.5 dB

## General Specifications

### Temperature Range

Operating	0°C to +55°C
Storage	-40°C to +75°C

### EMI Compatibility

Conducted and radiated interference CISPR Pub. 11 and Messemphaenger Postverfuegung 526/527/79.

### Audible Noise

<37.5 dBa pressure and <5.0 Bels power (ISODP7779)

5. Maximum output level minus TG feedthrough.

6. Up to 1 V<sub>s</sub> jitter due to 1 μs resolution of gate delay clock.

7. With GATE ON enabled and triggered. CW Signal, Peak Detector Mode.

### Power Requirements

ON (Line 1)	90 to 132 V rms, 47 to 440 Hz 195 to 250 V rms, 47 to 66 Hz Power consumption <500 VA; <180W
Standby (Line 0)	Power consumption <7 W

### User Program Memory

238 Kbytes non-volatile RAM

### Data Storage (nominal)

Internal	24 traces or 32 states
External	50 traces, 8 states
Memory card (85700A)	32 Kbytes

### Inputs/Outputs

#### Front Panel Connectors

Input	50 $\Omega$ Type N
(Opt 001)	75 $\Omega$ BNC female
(Opt 026)	APC 3.5 mm male
(Opt 027)	50 $\Omega$ Type N female
Cal Output	50 $\Omega$ BNC, -20 dBm, 300 MHz
100 MHz Comb Out	100 MHz $\pm$ 0.007%, SMA
Probe Power	+15 Vdc, -12.6 Vdc, and Gnd (150mA max each)

#### Rear Panel Connectors

Earphone (Opt 102 and 103)	1/8 inch monaural jack
LO Output (Opt 009)	50 $\Omega$ SMA Female, 3.0 to 6.8214 GHz
TV Trigger Output (Opt 101 and 102)	BNC, TTL levels, negative edge trigger after sync pulse
Gate Trigger Input (Opt 105)	50 $\Omega$ BNC, Pulsewidth >30 ns (TTL)
Gate Output (Opt 105)	50 $\Omega$ BNC (TTL)
SWEEP + Tune Output (Opt 009)	2 k $\Omega$ BNC, 0 to +10V, 0.36V/GHz of CF -66 dBV to +6 dBV
Ext. ALC Input 1 MW, Sweep Output	BNC, 5 k W, 0 to +10 V ramp
High Sweep In/Out	BNC, high TTL = sweep, low TTL = Retrace
Aux Video Out	50 $\Omega$ BNC, 0-1 V Uncalibrated
Aux IF Output	50 $\Omega$ BNC, -10 to -60 dBm, 21.4 MHz

#### Keyboard (Opt. 041 or 043)

5 Pin mini-DIN, compatible with HP C1405B and most IBM/AT key boards

#### Ext. Trigger Input

BNC, TTL levels, positive edge trigger

#### GPIO and Parallel (Opt 041)

SH1, AH1, T6, L4, ST1, RL1, PPO, DC1, C1 C2, C3, & C28 and 25 Pin subminiature D-shell female for parallel

#### RS-232 and Parallel (Opt 043)

9 Pin subminiature D-shell female and 25 Pin subminiature D-shell female for parallel

#### Ext Ref In

50  $\Omega$  BNC, 10 MHz, -2 to +10 dBm

#### 10 MHz Ref Output

50  $\Omega$  BNC, 10 MHz, 0 dBm

#### Aux Interface

9 pin "D" subminiature  
Pin 1-4, TTL Output  
Pin 5 TTL Input  
Pin 6 Gnd  
Pin 7 -15 vdc  $\pm$ 5%; 150 mA max  
Pin 8 +5 vdc  $\pm$ 5%; 150 mA max  
Pin 9 +15 vdc  $\pm$ 5%; 150 mA max  
50  $\Omega$  BNC,  
NTSC, 15.75 kHz, 60 Hz  
PAL, 15.625 kHz, 50 Hz

#### Monitor Out

Selectable Format

#### Dimensions (Nominal)

(Without handle, feet, or cover) 163 mm (H) x 325 mm (W) x 427 mm (D)

#### (Overall)

184 mm (H) x 373 mm (W) X 461 mm (D)

#### Weight (Nominal)

8591E	15.4 kg (34 lb)
8593E	16.4 kg (36 lb)
8594E	16.4 kg (36 lb)
8595E	16.4 kg (36 lb)
8596E	16.4 kg (36 lb)

